

A



PM-A15 **POS Terminal Machine**

Enhanced POS Solutions

Fan-Less designed for Hospitality Service

#Key Features

- #True Flat P-CAP Touch*
- #Slim Aluminum Chassis*
- #10 Point Touch Screen*
- #Easy Maintenance*
- #Fanless Technology*

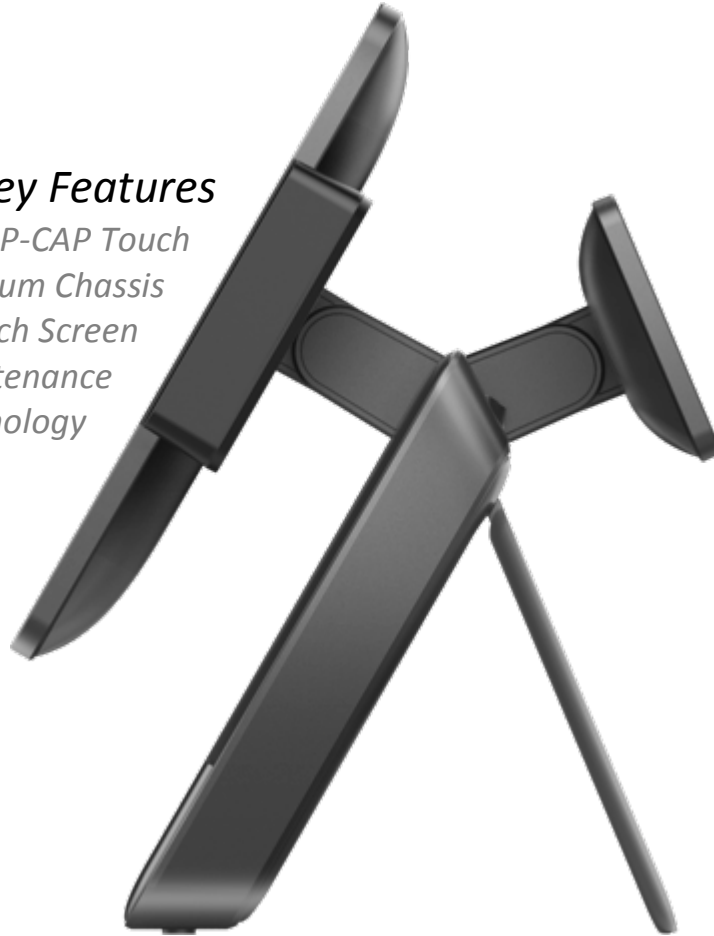

Intel Celeron J1900 | Core i3



2GB | 4GB | 8GB SODIMM DDR3




M-SATA 64GB | 128GB



15" Projective Capacitive



Product Specifications
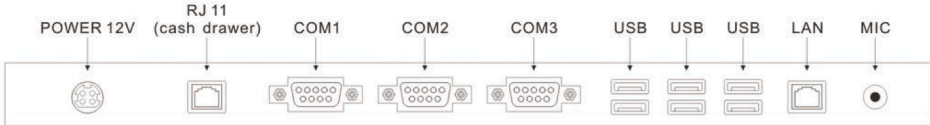
| Model | PM-A1510-D2 | PM-A1530-D2 |
|---|---|--|
| CPU | Intel Celeron Bay Trail D J1900 Quad Core up to 2.4G (2M Cache Fanless) | Intel Core i3 - 6100U Dual Core 2.3G 3MB Cache |
| Chipset | Bay Trail DJ1900 | I3-6100U+HM76 |
| Memory | 4GB DDR3 (up to 8GB) | 4GB DDR3 (up to 8GB) |
| HDD | 64GB/128GB MSATA SSD | 64GB/128GB MSATA SSD |
| Interface/ Port | <p>1xRJ11/6xUSB / 3xCOM/ 1xAudio / 1xLAN</p>  | |
| Touch Monitor | <p>15" Projected Capacitive Touch (1024x786) TRUE - FLAT SCREEN Brightness 300 cd/m2 Contrast 600:1 Response time 8ms</p> | |
| Dimension Packing | <p>190(W) X 430(L) X 430 (H) mm 8kg</p> | |
| Operation Condition | <p>Temperature: up to 40 degree Humidity: 10 to 80%</p> | |
| Add On A15-VFD A15-SD9 A15-SD15 A15-MSR WIFI OS | <p>20*2 lines VFD Customer Display 9.7" Monitor Display 15" Monitor Display MSR Card 1.2.3 Track Reader WiFi Module Window XP/7/8/10 POS Ready 2009 / 7 / 10 IOT</p> | |

